

To: All Authorized Persons
Registered Structural Engineers
Registered Geotechnical Engineers
Registered Inspectors
Registered General Building Contractors
Registered Specialist Contractors
Registered Minor Works Contractors

24 November 2020

Dear Sir/Madam,

**Amendments to Code of Practice for
Structural Use of Concrete 2013**

The Technical Committee (TC) on the Code of Practice for Structural Use of Concrete 2013 (the Code) set up by the Buildings Department (BD) regularly collects views and feedback received from the practitioners and the stakeholders arising from the use of the Code, and reviews the contents thereof for recommending the necessary update.

2. Having considered the TC's recommendations, certain amendments to the Code (as detailed at Annex) are promulgated with immediate effect from the date of this letter. The amendments have been uploaded to BD website www.bd.gov.hk under the "Code and design manuals" page of the "Resources" section.

3. The major amendments include:

- (a) newly added clause 3.3 of the Code – design requirements for the use of Grade 500A welded fabric;
- (b) table 9.1 and clauses 9.3.1.1 and 9.4.2 of the Code – revision of the design requirements for minimum percentage of reinforcement for elements with different concrete strengths; and
- (c) clause 9.4.1 of the Code – revision of the design requirements for pure cantilevered slab.

Yours faithfully,



(HO Hon-kit, Humphrey)
Assistant Director/New Buildings 2
for Building Authority

**Amendments to the Code of Practice for Structural Use of Concrete 2013
(November 2020)**

Legends:

 Amended
 Deleted

Amendments to the Code of Practice for Structural Use of Concrete 2013

Item	Current version	Amendments
1. Contents	3.2 Reinforcing steel <ul style="list-style-type: none"> 3.2.1 General 3.2.2 Characteristic strength 3.2.3 Strength classes 3.2.4 Elastic modulus 3.2.5 Physical properties 3.2.6 Stress-strain relationships for design 3.2.7 Weldability 3.2.8 Mechanical couplers 3.3 Prestressing tendons <ul style="list-style-type: none"> 3.3.1 General 3.3.2 Characteristic strength 3.3.3 Ductility 3.3.4 Physical properties 3.3.5 Stress-strain relationships for design 3.4 Prestressing devices <ul style="list-style-type: none"> 3.4.1 Anchorages and couplers 3.5 New Materials <ul style="list-style-type: none"> 3.5.1 General 	3.2 Reinforcing steel <ul style="list-style-type: none"> 3.2.1 General 3.2.2 Characteristic strength 3.2.3 Strength classes 3.2.4 Elastic modulus 3.2.5 Physical properties 3.2.6 Stress-strain relationships for design 3.2.7 Weldability 3.2.8 Mechanical couplers 3.3 Welded fabric <ul style="list-style-type: none"> 3.3.1 General 3.3.2 Materials, Fabrication, Sampling and Testing 3.3.3 Additional requirements for Grade 500A welded fabric 3.4 Prestressing tendons <ul style="list-style-type: none"> 3.4.1 General 3.4.2 Characteristic strength

Item	Current version	Amendments
	<p>3.5.2 Acceptance requirements</p> <p>3.6 Design strength at elevated temperatures</p>	<p>3.4.3 Ductility</p> <p>3.4.4 Physical properties</p> <p>3.4.5 Stress-strain relationships for design</p> <p>3.5 Prestressing devices</p> <p>3.5.1 Anchorages and couplers</p> <p>3.6 New Materials</p> <p>3.6.1 General</p> <p>3.6.2 Acceptance requirements</p> <p>3.7 Design strength at elevated temperatures</p>
<p>2. Clause 1.4.1 New general term ¹</p>	<p>ultimate limit state (ULS) that state associated with collapse or with other similar forms of structural failure (see clause 2.2.2.1)</p>	<p>ultimate limit state (ULS) that state associated with collapse or with other similar forms of structural failure (see clause 2.2.2.1)</p> <p>welded fabric arrangement of longitudinal and transverse bars of the same or different nominal diameter arranged</p>

¹ The term “welded fabric” is defined. The terms “fabric” and “welded mesh fabrics” are replaced by “welded fabric” correspondingly.

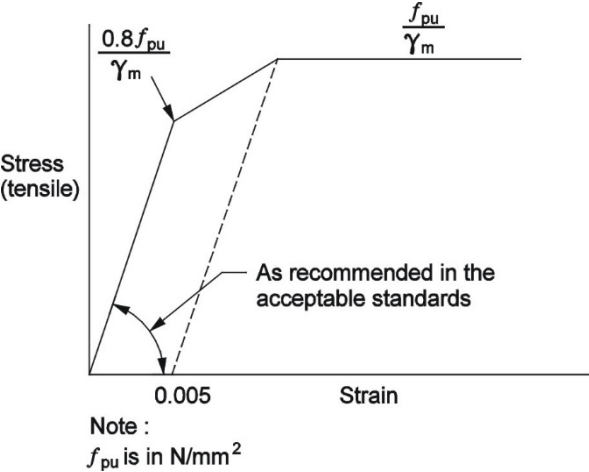
Annex

Item	Current version	Amendments
		substantially at right angles to each other that are welded together at all points of intersection by electrical resistance welding in a factory using automatic machines (see clause 3.3)
3. Clause 1.5 New symbol ²	z lever arm γ_f partial safety factor for load	z lever arm α_{min} modification factor for minimum steel ratio for tensile reinforcement and transverse reinforcement γ_f partial safety factor for load
4. Clause 2.2.3.2 1 st paragraph ³	The structural integrity of the building and its members should be checked for the effects of the design fire. In the checking, the strength of concrete and reinforcement should be based on the values given in clause 3.6, and the partial safety factors for loads and materials should be based on the values given in clauses 2.3.2.7 and 2.4.3.2 respectively.	The structural integrity of the building and its members should be checked for the effects of the design fire. In the checking, the strength of concrete and reinforcement should be based on the values given in clause 3.7, and the partial safety factors for loads and materials should be based on the values given in clauses 2.3.2.7 and 2.4.3.2 respectively.

² Modification factor for minimum steel ratio of tensile reinforcement and transverse reinforcement is introduced to take into account different concrete strengths.

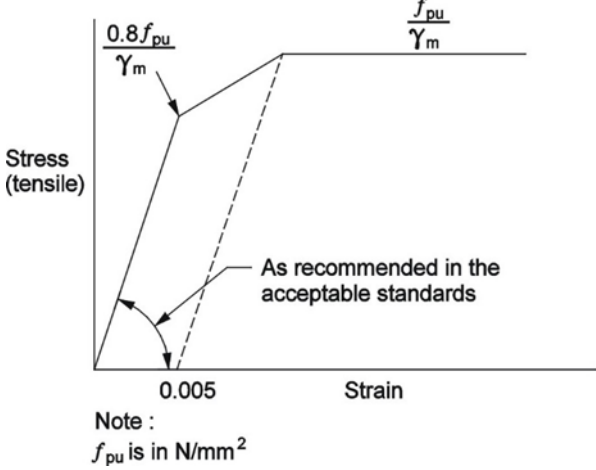
³ Consequential re-numbering of clause due to insertion of new clause 3.3 for welded fabric.

Item	Current version	Amendments
5. Clause 3.3 New clause ^{1 & 3}	<p>3.3 PRESTRESSING TENDONS</p> <p>3.3.1 General</p> <p>This section applies to wires, bars and strands complying with acceptable standards, and used as prestressing tendons in concrete structures.</p> <p>3.3.2 Characteristic strength</p> <p>The characteristic strength of a prestressing tendon, unless stated otherwise, means the ultimate strength below which 5% of all possible test results would be expected to fall.</p> <p>3.3.3 Ductility</p> <p>The products shall have adequate ductility in elongation and bending.</p> <p>3.3.4 Physical properties</p> <p>The following mean values may be used:</p> <ul style="list-style-type: none"> (a) density 7850 kg/m³; and (b) coefficient of thermal expansion 12x10⁻⁶/°C. <p>3.3.5 Stress-strain relationships for design</p>	<p>3.3 WELDED FABRIC</p> <p>3.3.1 General</p> <p>Unless otherwise stated, the requirements for steel reinforcing bars apply to welded fabric. In each single panel of welded fabric, the bars should be of the same characteristics (type and grade). Bars of different diameters could be used in different directions but only one nominal diameter should be used in each direction.</p> <p>3.3.2 Materials, fabrication, sampling and testing</p> <p>The material properties of Grade 500A steel reinforcing bars used for manufacturing the welded fabric should comply with BS 4449 while those of Grade 500B and Grade 500C steel reinforcing bars used for manufacturing the welded fabric should comply with CS2. The fabrication, sampling and testing other than material properties for all welded fabric, i.e. Grade 500A, 500B and 500C should comply with BS 4483. Determination of fatigue properties of steel reinforcing bars used for manufacturing the welded fabric is an optional</p>

Item	Current version	Amendments
	<p>The short-term design stress-strain curve for prestressing tendons is given in figure 3.10 below, with γ_m having the relevant value. For sustained loading, appropriate allowance for relaxation should be made.</p>  <p>Note : f_{pu} is in N/mm^2</p> <p>Figure 3.10 - Short-term design stress-strain curve for prestressing tendons</p>	<p>requirement on the basis of the type of structure in which the welded fabrics are to be cast.</p> <p>3.3.3 Additional requirements for Grade 500A welded fabric</p> <p>Grade 500A welded fabric should be manufactured by steel reinforcing bars with diameters from 8 mm to 16 mm. In all conditions, moment redistribution is not allowed.</p> <p>In addition, Grade 500A welded fabric should only be used in the following locations:</p> <p>(a) Slab</p> <ul style="list-style-type: none"> (i) sections not contributing to the lateral load resisting system; (ii) sections other than column strips of flat slab system and similar slab structures providing structural ties for robustness against disproportionate collapse; and (iii) slab sections with low bending stress, i.e.

Item	Current version	Amendments
		<div style="background-color: yellow; padding: 5px;"> $K = \frac{M}{f_{cu}bd^2} \leq 0.156 \quad \text{for } f_{cu} \leq 45 \text{ N/mm}^2$ $\leq 0.120 \quad \text{for } 45 < f_{cu} \leq 70 \text{ N/mm}^2$ </div> <p style="margin-left: 40px;">(b) Wall</p> <div style="background-color: yellow; padding: 5px; margin-left: 40px;"> Outside confined boundary elements as defined in clause 9.9.3.2. </div> <p>3.4 PRESTRESSING TENDONS</p> <p>3.4.1 General</p> <p>This section applies to wires, bars and strands complying with acceptable standards, and used as prestressing tendons in concrete structures.</p> <p>3.4.2 Characteristic strength</p> <p>The characteristic strength of a prestressing tendon, unless stated otherwise, means the ultimate strength below which 5% of all possible test results would be expected to fall.</p> <p>3.4.3 Ductility</p>

Item	Current version	Amendments
		<p>The products shall have adequate ductility in elongation and bending.</p> <p>3.4.4 Physical properties</p> <p>The following mean values may be used:</p> <ul style="list-style-type: none"> (a) density 7850 kg/m³; and (b) coefficient of thermal expansion 12x10⁻⁶/°C. <p>3.4.5 Stress-strain relationships for design</p> <p>The short-term design stress-strain curve for prestressing tendons is given in figure 3.10 below, with γ_m having the relevant value. For sustained loading, appropriate allowance for relaxation should be made.</p>

Item	Current version	Amendments
		 <p>Note : f_{pu} is in N/mm^2</p> <p>Figure 3.10 - Short-term design stress-strain curve for prestressing tendons</p>
6. Clause 3.4 ³	<p>3.4 PRESTRESSING DEVICES</p> <p>3.4.1 Anchorages and couplers</p> <p>3.4.1.1 General</p> <p>This section applies to anchoring devices (anchorages) and coupling devices (couplers) in post tensioned construction.</p> <p>All anchorages should comply with the acceptable standards.</p>	<p>3.5 PRESTRESSING DEVICES</p> <p>3.5.1 Anchorages and couplers</p> <p>3.5.1.1 General</p> <p>This section applies to anchoring devices (anchorages) and coupling devices (couplers) in post tensioned construction.</p> <p>All anchorages should comply with the acceptable standards.</p>

Item	Current version	Amendments
	<p>3.4.1.2 Mechanical properties Tendon-anchorage assemblies and tendon coupler assemblies shall have strength, elongation and fatigue characteristics sufficient to meet the basic requirements of section 2.</p>	<p>3.5.1.2 Mechanical properties Tendon-anchorage assemblies and tendon coupler assemblies shall have strength, elongation and fatigue characteristics sufficient to meet the basic requirements of section 2.</p>
<p>7. Clause 3.5³</p>	<p>3.5 NEW MATERIALS</p> <p>3.5.1 General The requirements of this code of practice are not to be construed as prohibiting the use of new and alternative materials.</p> <p>3.5.2 Acceptance requirements The properties of new materials must be adequately demonstrated to comply with the basic requirements of section 2. For this purpose sufficient information must be provided, including manufacturing data, testing and proposed quality controls, to allow independent third party evaluation of such compliance.</p>	<p>3.6 NEW MATERIALS</p> <p>3.6.1 General The requirements of this code of practice are not to be construed as prohibiting the use of new and alternative materials.</p> <p>3.6.2 Acceptance requirements The properties of new materials must be adequately demonstrated to comply with the basic requirements of section 2. For this purpose sufficient information must be provided, including manufacturing data, testing and proposed quality controls, to allow independent third party evaluation of such compliance.</p>

Annex

Item	Current version	Amendments																												
8. Clause 3.6 ³	3.6 DESIGN STRENGTH AT ELEVATED TEMPERATURES	3.7 DESIGN STRENGTH AT ELEVATED TEMPERATURES																												
9. Clause 8.4.1 1 st paragraph ¹	Reinforcing bars, wires or welded mesh fabrics shall be so anchored that the bond forces are safely transmitted to the concrete avoiding longitudinal cracking or spalling. Transverse reinforcement shall be provided if necessary.	Reinforcing bars, wires or welded fabrics should be so anchored that the bond forces are safely transmitted to the concrete avoiding longitudinal cracking or spalling. Transverse reinforcement shall be provided if necessary.																												
10. Table 8.3 ¹	<table border="1" style="width: 100%; border-collapse: collapse; margin-bottom: 5px;"> <thead> <tr> <th rowspan="2" style="width: 30%; text-align: center;">Bar type</th> <th colspan="2" style="text-align: center;">β</th> </tr> <tr> <th style="width: 30%; text-align: center;">Bars in tension</th> <th style="width: 40%; text-align: center;">Bars in compression</th> </tr> </thead> <tbody> <tr> <td>Plain bars</td> <td style="text-align: center;">0.28</td> <td style="text-align: center;">0.35</td> </tr> <tr> <td>Ribbed bars</td> <td style="text-align: center;">0.50</td> <td style="text-align: center;">0.63</td> </tr> <tr> <td>Fabric (see clause 8.4.6)</td> <td style="text-align: center;">0.65</td> <td style="text-align: center;">0.81</td> </tr> </tbody> </table> <p>Table 8.3 - Values of bond coefficient β</p>	Bar type	β		Bars in tension	Bars in compression	Plain bars	0.28	0.35	Ribbed bars	0.50	0.63	Fabric (see clause 8.4.6)	0.65	0.81	<table border="1" style="width: 100%; border-collapse: collapse; margin-bottom: 5px;"> <thead> <tr> <th rowspan="2" style="width: 30%; text-align: center;">Bar type</th> <th colspan="2" style="text-align: center;">β</th> </tr> <tr> <th style="width: 30%; text-align: center;">Bars in tension</th> <th style="width: 40%; text-align: center;">Bars in compression</th> </tr> </thead> <tbody> <tr> <td>Plain bars</td> <td style="text-align: center;">0.28</td> <td style="text-align: center;">0.35</td> </tr> <tr> <td>Ribbed bars</td> <td style="text-align: center;">0.50</td> <td style="text-align: center;">0.63</td> </tr> <tr> <td>Welded fabric (see clause 8.4.6)</td> <td style="text-align: center;">0.65</td> <td style="text-align: center;">0.81</td> </tr> </tbody> </table> <p>Table 8.3 - Values of bond coefficient β</p>	Bar type	β		Bars in tension	Bars in compression	Plain bars	0.28	0.35	Ribbed bars	0.50	0.63	Welded fabric (see clause 8.4.6)	0.65	0.81
Bar type	β																													
	Bars in tension	Bars in compression																												
Plain bars	0.28	0.35																												
Ribbed bars	0.50	0.63																												
Fabric (see clause 8.4.6)	0.65	0.81																												
Bar type	β																													
	Bars in tension	Bars in compression																												
Plain bars	0.28	0.35																												
Ribbed bars	0.50	0.63																												
Welded fabric (see clause 8.4.6)	0.65	0.81																												

Item	Current version	Amendments																																																																																																																																												
11. Table 8.4 ¹	<table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <thead> <tr> <th rowspan="3">Concrete Grade</th> <th rowspan="3">Type of anchorage length</th> <th colspan="3">Reinforcement types</th> </tr> <tr> <th rowspan="2">f_y 250 N/mm²</th> <th colspan="2">f_y 500 N/mm²</th> </tr> <tr> <th>Ribbed</th> <th>Fabric</th> </tr> </thead> <tbody> <tr><td>30</td><td>Tension</td><td>36</td><td>40</td><td>31</td></tr> <tr><td></td><td>Compression</td><td>29</td><td>32</td><td>25</td></tr> <tr><td>35</td><td>Tension</td><td>33</td><td>38</td><td>29</td></tr> <tr><td></td><td>Compression</td><td>27</td><td>30</td><td>23</td></tr> <tr><td>40</td><td>Tension</td><td>31</td><td>35</td><td>27</td></tr> <tr><td></td><td>Compression</td><td>25</td><td>28</td><td>22</td></tr> <tr><td>45</td><td>Tension</td><td>29</td><td>33</td><td>25</td></tr> <tr><td></td><td>Compression</td><td>24</td><td>26</td><td>20</td></tr> <tr><td>50</td><td>Tension</td><td>28</td><td>31</td><td>24</td></tr> <tr><td></td><td>Compression</td><td>22</td><td>25</td><td>19</td></tr> <tr><td>≥ 60</td><td>Tension</td><td>26</td><td>28</td><td>22</td></tr> <tr><td></td><td>Compression</td><td>20</td><td>23</td><td>18</td></tr> </tbody> </table> <p>Table 8.4 - Ultimate anchorage bond lengths (l_b) as multiples of bar diameter</p>	Concrete Grade	Type of anchorage length	Reinforcement types			f_y 250 N/mm ²	f_y 500 N/mm ²		Ribbed	Fabric	30	Tension	36	40	31		Compression	29	32	25	35	Tension	33	38	29		Compression	27	30	23	40	Tension	31	35	27		Compression	25	28	22	45	Tension	29	33	25		Compression	24	26	20	50	Tension	28	31	24		Compression	22	25	19	≥ 60	Tension	26	28	22		Compression	20	23	18	<table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <thead> <tr> <th rowspan="3">Concrete Grade</th> <th rowspan="3">Type of anchorage length</th> <th colspan="3">Reinforcement types</th> </tr> <tr> <th rowspan="2">f_y 250 N/mm²</th> <th colspan="2">f_y 500 N/mm²</th> </tr> <tr> <th>Ribbed</th> <th>Welded fabric</th> </tr> </thead> <tbody> <tr><td>30</td><td>Tension</td><td>36</td><td>40</td><td>31</td></tr> <tr><td></td><td>Compression</td><td>29</td><td>32</td><td>25</td></tr> <tr><td>35</td><td>Tension</td><td>33</td><td>38</td><td>29</td></tr> <tr><td></td><td>Compression</td><td>27</td><td>30</td><td>23</td></tr> <tr><td>40</td><td>Tension</td><td>31</td><td>35</td><td>27</td></tr> <tr><td></td><td>Compression</td><td>25</td><td>28</td><td>22</td></tr> <tr><td>45</td><td>Tension</td><td>29</td><td>33</td><td>25</td></tr> <tr><td></td><td>Compression</td><td>24</td><td>26</td><td>20</td></tr> <tr><td>50</td><td>Tension</td><td>28</td><td>31</td><td>24</td></tr> <tr><td></td><td>Compression</td><td>22</td><td>25</td><td>19</td></tr> <tr><td>≥ 60</td><td>Tension</td><td>26</td><td>28</td><td>22</td></tr> <tr><td></td><td>Compression</td><td>20</td><td>23</td><td>18</td></tr> </tbody> </table> <p>Table 8.4 - Ultimate anchorage bond lengths (l_b) as multiples of bar diameter</p>	Concrete Grade	Type of anchorage length	Reinforcement types			f_y 250 N/mm ²	f_y 500 N/mm ²		Ribbed	Welded fabric	30	Tension	36	40	31		Compression	29	32	25	35	Tension	33	38	29		Compression	27	30	23	40	Tension	31	35	27		Compression	25	28	22	45	Tension	29	33	25		Compression	24	26	20	50	Tension	28	31	24		Compression	22	25	19	≥ 60	Tension	26	28	22		Compression	20	23	18
Concrete Grade	Type of anchorage length			Reinforcement types																																																																																																																																										
				f_y 250 N/mm ²	f_y 500 N/mm ²																																																																																																																																									
		Ribbed	Fabric																																																																																																																																											
30	Tension	36	40	31																																																																																																																																										
	Compression	29	32	25																																																																																																																																										
35	Tension	33	38	29																																																																																																																																										
	Compression	27	30	23																																																																																																																																										
40	Tension	31	35	27																																																																																																																																										
	Compression	25	28	22																																																																																																																																										
45	Tension	29	33	25																																																																																																																																										
	Compression	24	26	20																																																																																																																																										
50	Tension	28	31	24																																																																																																																																										
	Compression	22	25	19																																																																																																																																										
≥ 60	Tension	26	28	22																																																																																																																																										
	Compression	20	23	18																																																																																																																																										
Concrete Grade	Type of anchorage length	Reinforcement types																																																																																																																																												
		f_y 250 N/mm ²	f_y 500 N/mm ²																																																																																																																																											
			Ribbed	Welded fabric																																																																																																																																										
30	Tension	36	40	31																																																																																																																																										
	Compression	29	32	25																																																																																																																																										
35	Tension	33	38	29																																																																																																																																										
	Compression	27	30	23																																																																																																																																										
40	Tension	31	35	27																																																																																																																																										
	Compression	25	28	22																																																																																																																																										
45	Tension	29	33	25																																																																																																																																										
	Compression	24	26	20																																																																																																																																										
50	Tension	28	31	24																																																																																																																																										
	Compression	22	25	19																																																																																																																																										
≥ 60	Tension	26	28	22																																																																																																																																										
	Compression	20	23	18																																																																																																																																										

Item	Current version	Amendments
12. Clause 8.4.7 1 st paragraph ¹	<p>8.4.7 Design ultimate anchorage bond stress for fabric</p> <p>The value of design ultimate anchorage bond stress given in clause 8.4.4 for fabric is applicable to fabric manufactured from bars or wires conforming to the acceptable standards. This is provided that:</p> <p>(a) the fabric is welded in a shear resistance manner conforming to the acceptable standards; and</p> <p>(b) the number of welded intersections within the anchorage length is at least equal to $4A_{s \text{ req}} / A_{s \text{ prov}}$.</p>	<p>8.4.7 Design ultimate anchorage bond stress for welded fabric</p> <p>The value of design ultimate anchorage bond stress given in clause 8.4.4 for welded fabric is applicable to fabric manufactured from bars or wires conforming to the acceptable standards. This is provided that:</p> <p>(a) the welded fabric is welded in a shear resistance manner conforming to the acceptable standards; and</p> <p>(b) the number of welded intersections within the anchorage length is at least equal to $4A_{s \text{ req}} / A_{s \text{ prov}}$.</p>
13. Clause 8.7.3.1 ¹	The minimum lap length for bar reinforcement should be not less than 15 times the bar diameter or 300 mm, whichever is greater, and for fabric reinforcement should not be less than 250 mm.	The minimum lap length for bar reinforcement should be not less than 15 times the bar diameter or 300 mm, whichever is greater, and for welded fabric should not be less than 250 mm.
14. Clause 8.7.3.2 1 st paragraph ¹	The tension lap length should be at least equal to the design tension anchorage length (see clause 8.4.5) necessary to develop the required stress in the reinforcement. Lap lengths for unequal size bars (or wires in fabric) may be	The tension lap length should be at least equal to the design tension anchorage length (see clause 8.4.5) necessary to develop the required stress in the reinforcement. Lap lengths for unequal size bars (or wires in welded fabric) may

Annex

Item	Current version	Amendments																																																			
	based upon the diameter of the smaller bar. The following provisions also apply:	be based upon the diameter of the smaller bar. The following provisions also apply:																																																			
15. Clause 8.7.3.3 1 st paragraph ¹	The compression lap length should be at least 25% greater than the design compression anchorage length (see clause 8.4.5) necessary to develop the required stress in the reinforcement. Lap lengths for unequal size bars (or wires in fabric) may be based upon the smaller bar diameter.	The compression lap length should be at least 25% greater than the design compression anchorage length (see clause 8.4.5) necessary to develop the required stress in the reinforcement. Lap lengths for unequal size bars (or wires in welded fabric) may be based upon the smaller bar diameter.																																																			
16. Table 8.5 ¹	<table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <thead> <tr> <th rowspan="3">Concrete Grade</th> <th rowspan="3">Type of lap length</th> <th colspan="3">Reinforcement types</th> </tr> <tr> <th rowspan="2">f_y 250 N/mm²</th> <th colspan="2">f_y 500 N/mm²</th> </tr> <tr> <th>Ribbed</th> <th>Fabric</th> </tr> </thead> <tbody> <tr> <td rowspan="3">30</td> <td>Tension and compression lap length – l_o</td> <td>36</td> <td>40</td> <td>31</td> </tr> <tr> <td>1.4 x tension lap</td> <td>50</td> <td>56</td> <td>44</td> </tr> <tr> <td>2.0 x tension lap</td> <td>71</td> <td>80</td> <td>62</td> </tr> <tr> <td>35</td> <td>Tension and compression lap length – l_o</td> <td>33</td> <td>38</td> <td>29</td> </tr> </tbody> </table>	Concrete Grade	Type of lap length	Reinforcement types			f_y 250 N/mm ²	f_y 500 N/mm ²		Ribbed	Fabric	30	Tension and compression lap length – l_o	36	40	31	1.4 x tension lap	50	56	44	2.0 x tension lap	71	80	62	35	Tension and compression lap length – l_o	33	38	29	<table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <thead> <tr> <th rowspan="3">Concrete Grade</th> <th rowspan="3">Type of lap length</th> <th colspan="3">Reinforcement types</th> </tr> <tr> <th rowspan="2">f_y 250 N/mm²</th> <th colspan="2">f_y 500 N/mm²</th> </tr> <tr> <th>Ribbed</th> <th>Welded fabric</th> </tr> </thead> <tbody> <tr> <td rowspan="3">30</td> <td>Tension and compression lap length – l_o</td> <td>36</td> <td>40</td> <td>31</td> </tr> <tr> <td>1.4 x tension lap</td> <td>50</td> <td>56</td> <td>44</td> </tr> <tr> <td>2.0 x tension lap</td> <td>71</td> <td>80</td> <td>62</td> </tr> </tbody> </table>	Concrete Grade	Type of lap length	Reinforcement types			f_y 250 N/mm ²	f_y 500 N/mm ²		Ribbed	Welded fabric	30	Tension and compression lap length – l_o	36	40	31	1.4 x tension lap	50	56	44	2.0 x tension lap	71	80	62
Concrete Grade	Type of lap length			Reinforcement types																																																	
				f_y 250 N/mm ²	f_y 500 N/mm ²																																																
		Ribbed	Fabric																																																		
30	Tension and compression lap length – l_o	36	40	31																																																	
	1.4 x tension lap	50	56	44																																																	
	2.0 x tension lap	71	80	62																																																	
35	Tension and compression lap length – l_o	33	38	29																																																	
Concrete Grade	Type of lap length	Reinforcement types																																																			
		f_y 250 N/mm ²	f_y 500 N/mm ²																																																		
			Ribbed	Welded fabric																																																	
30	Tension and compression lap length – l_o	36	40	31																																																	
	1.4 x tension lap	50	56	44																																																	
	2.0 x tension lap	71	80	62																																																	

Annex

Item	Current version					Amendments				
		1.4 x tension lap	46	52	40	35	Tension and compression lap length – l_o	33	38	29
		2.0 x tension lap	66	75	57		1.4 x tension lap	46	52	40
							2.0 x tension lap	66	75	57
	40	Tension and compression lap length – l_o	31	35	27	40	Tension and compression lap length – l_o	31	35	27
		1.4 x tension lap	43	49	38		1.4 x tension lap	43	49	38
		2.0 x tension lap	62	70	54		2.0 x tension lap	62	70	54
	45	Tension and compression lap length – l_o	29	33	25	45	Tension and compression lap length – l_o	29	33	25
		1.4 x tension lap	41	47	35		1.4 x tension lap	41	47	35
		2.0 x tension lap	58	66	50		2.0 x tension lap	58	66	50
	50	Tension and compression lap length – l_o	28	31	24	50	Tension and compression lap length – l_o	28	31	24
		1.4 x tension lap	39	44	34		1.4 x tension lap	39	44	34
		2.0 x tension lap	55	62	48		2.0 x tension lap	55	62	48
≥ 60	Tension and compression lap length – l_o	26	28	22	≥ 60	Tension and compression lap length – l_o	26	28	22	
	1.4 x tension lap	36	40	31		1.4 x tension lap	36	40	31	
	2.0 x tension lap	51	56	44		2.0 x tension lap	51	56	44	

Item	Current version	Amendments																																																												
	<p>Notes:</p> <p>1. The values are rounded up to the nearest whole number and the length derived from these values may differ slightly from those calculated directly for each bar or wire size.</p> <p>Table 8.5 - Ultimate lap lengths as multiples of bar diameter</p>	<p>Notes:</p> <p>1. The values are rounded up to the nearest whole number and the length derived from these values may differ slightly from those calculated directly for each bar or wire size.</p> <p>Table 8.5 - Ultimate lap lengths as multiples of bar diameter</p>																																																												
17. Table 9.1 ²	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th rowspan="2" style="width: 30%;">Situation</th> <th rowspan="2" style="width: 15%;">Definition of percentage</th> <th colspan="2" style="width: 20%;">Minimum percentage</th> </tr> <tr> <th style="width: 10%;">$f_y = 250$ N/mm² (%)</th> <th style="width: 10%;">$f_y = 500$ N/mm² (%)</th> </tr> </thead> <tbody> <tr> <td><i>Tension reinforcement</i></td> <td></td> <td></td> <td></td> </tr> <tr> <td>Sections subjected mainly to pure tension</td> <td>$100A_s/A_c$</td> <td>0.8</td> <td>0.45</td> </tr> <tr> <td>Sections subjected to flexure:</td> <td></td> <td></td> <td></td> </tr> <tr> <td>(i) flanged beams, web in tension:</td> <td>$100A_s/b_w h$</td> <td>0.32</td> <td>0.18</td> </tr> <tr> <td style="padding-left: 40px;">$b_w/b < 0.4$</td> <td>$100A_s/b_w h$</td> <td>0.24</td> <td>0.13</td> </tr> <tr> <td style="padding-left: 40px;">$b_w/b \geq 0.4$</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Situation	Definition of percentage	Minimum percentage		$f_y = 250$ N/mm ² (%)	$f_y = 500$ N/mm ² (%)	<i>Tension reinforcement</i>				Sections subjected mainly to pure tension	$100A_s/A_c$	0.8	0.45	Sections subjected to flexure:				(i) flanged beams, web in tension:	$100A_s/b_w h$	0.32	0.18	$b_w/b < 0.4$	$100A_s/b_w h$	0.24	0.13	$b_w/b \geq 0.4$				<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th rowspan="2" style="width: 30%;">Situation</th> <th rowspan="2" style="width: 15%;">Definition of percentage</th> <th colspan="2" style="width: 20%;">Minimum percentage</th> </tr> <tr> <th style="width: 10%;">$f_y = 250$ N/mm² (%)</th> <th style="width: 10%;">$f_y = 500$ N/mm² (%)</th> </tr> </thead> <tbody> <tr> <td><i>Tension reinforcement</i></td> <td></td> <td></td> <td></td> </tr> <tr> <td>Sections subjected mainly to pure tension</td> <td>$100A_s/A_c$</td> <td>0.8 α_{min}</td> <td>0.45 α_{min}</td> </tr> <tr> <td>Sections subjected to flexure:</td> <td></td> <td></td> <td></td> </tr> <tr> <td>(i) flanged beams, web in tension:</td> <td>$100A_s/b_w h$</td> <td>0.32 α_{min}</td> <td>0.18 α_{min}</td> </tr> <tr> <td style="padding-left: 40px;">$b_w/b < 0.4$</td> <td>$100A_s/b_w h$</td> <td>0.24 α_{min}</td> <td>0.13 α_{min}</td> </tr> <tr> <td style="padding-left: 40px;">$b_w/b \geq 0.4$</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Situation	Definition of percentage	Minimum percentage		$f_y = 250$ N/mm ² (%)	$f_y = 500$ N/mm ² (%)	<i>Tension reinforcement</i>				Sections subjected mainly to pure tension	$100A_s/A_c$	0.8 α_{min}	0.45 α_{min}	Sections subjected to flexure:				(i) flanged beams, web in tension:	$100A_s/b_w h$	0.32 α_{min}	0.18 α_{min}	$b_w/b < 0.4$	$100A_s/b_w h$	0.24 α_{min}	0.13 α_{min}	$b_w/b \geq 0.4$			
Situation	Definition of percentage			Minimum percentage																																																										
		$f_y = 250$ N/mm ² (%)	$f_y = 500$ N/mm ² (%)																																																											
<i>Tension reinforcement</i>																																																														
Sections subjected mainly to pure tension	$100A_s/A_c$	0.8	0.45																																																											
Sections subjected to flexure:																																																														
(i) flanged beams, web in tension:	$100A_s/b_w h$	0.32	0.18																																																											
$b_w/b < 0.4$	$100A_s/b_w h$	0.24	0.13																																																											
$b_w/b \geq 0.4$																																																														
Situation	Definition of percentage	Minimum percentage																																																												
		$f_y = 250$ N/mm ² (%)	$f_y = 500$ N/mm ² (%)																																																											
<i>Tension reinforcement</i>																																																														
Sections subjected mainly to pure tension	$100A_s/A_c$	0.8 α_{min}	0.45 α_{min}																																																											
Sections subjected to flexure:																																																														
(i) flanged beams, web in tension:	$100A_s/b_w h$	0.32 α_{min}	0.18 α_{min}																																																											
$b_w/b < 0.4$	$100A_s/b_w h$	0.24 α_{min}	0.13 α_{min}																																																											
$b_w/b \geq 0.4$																																																														

Annex

Item	Current version				Amendments			
	(ii) flanged beams, flange in tension:	$100A_s/b_w h$	0.48	0.26	(ii) flanged beams, flange in tension:	$100A_s/b_w h$	0.48 α_{min}	0.26 α_{min}
	T-beam	$100A_s/b_w h$	0.36	0.20	T-beam	$100A_s/b_w h$	0.36 α_{min}	0.20 α_{min}
	L-beam				L-beam			
	(iii) rectangular section	$100A_s/A_c$	0.24	0.13	(iii) rectangular section	$100A_s/A_c$	0.24 α_{min}	0.13 α_{min}
	<i>Compression reinforcement</i> (where such reinforcement is required for the ultimate limit state)				<i>Compression reinforcement</i> (where such reinforcement is required for the ultimate limit state)			
	General rule	$100A_{sc}/A_{cc}$	0.4	0.4	General rule	$100A_{sc}/A_{cc}$	0.4	0.4
	Simplified rules for particular cases:				Simplified rules for particular cases:			
	(i) rectangular beam	$100A_{sc}/A_c$	0.2	0.2	(i) rectangular beam	$100A_{sc}/A_c$	0.2	0.2
	(ii) flanged beam				(ii) flanged beam			
	flange in	$100A_{sc}/bh_f$	0.4	0.4	flange in	$100A_{sc}/bh_f$	0.4	0.4
	compression	$100A_{sc}/b_w h$	0.2	0.2	compression	$100A_{sc}/b_w h$	0.2	0.2
	web in compression				web in compression			

Item	Current version	Amendments			
	<p><i>Transverse reinforcement in flanges of flanged beams</i></p> <p>(provided over full effective flange width near top surface to resist horizontal shear)</p> <p style="text-align: center;">$100 A_{st}/h_f l$</p> <p style="text-align: center;">0.15</p> <p style="text-align: center;">0.15</p> <p>Notes:</p> <p>1. The minimum percentages of reinforcement should be increased where necessary to meet the ductility requirements given in clause 9.9.</p> <p>Table 9.1 - Minimum percentages of reinforcement</p>	<p><i>Transverse reinforcement in flanges of flanged beams</i></p> <p>(provided over full effective flange width near top surface to resist horizontal shear)</p> <p style="text-align: center;">$100 A_{st}/h_f l$</p> <p style="text-align: center;">0.15 α_{min}</p> <p style="text-align: center;">0.15 α_{min}</p> <p>Notes:</p> <p>1. The minimum percentages of reinforcement should be increased where necessary to meet the ductility requirements given in clause 9.9.</p> <p>2. $\alpha_{min} = 40f_{cu}^{2/3}/f_y$ but not less than 1.0.</p> <p>Table 9.1 - Minimum percentages of reinforcement</p>			
18. Clause 9.3.1.1(a) ²	<p>The following minimum percentages of total longitudinal reinforcement should be provided in each direction:</p> <p>(i) $f_y = 250 \text{ N/mm}^2$: 0.24% of concrete cross-sectional area; and</p> <p>(ii) $f_y = 500 \text{ N/mm}^2$: 0.13% of concrete cross-sectional area.</p> <p>Generally secondary transverse reinforcement of not less than 20% of the principal reinforcement should be provided in one-way slabs. In areas near supports transverse</p>	<p>The following minimum percentages of total longitudinal reinforcement should be provided in each direction:</p> <p>(i) $f_y = 250 \text{ N/mm}^2$: 0.24% of concrete cross-sectional area; and</p> <p>(ii) $f_y = 500 \text{ N/mm}^2$: 0.13% of concrete cross-sectional area.</p> <p>For tension reinforcement, the minimum percentages of total longitudinal reinforcement should be multiplied by a modification factor, $\alpha_{min} = 40f_{cu}^{2/3}/f_y$ but not less than 1.0.</p>			

Item	Current version	Amendments
	reinforcement to principal top bars is not necessary where there is no transverse bending moment.	Generally secondary transverse reinforcement of not less than 20% of the principal reinforcement should be provided in one-way slabs. In areas near supports transverse reinforcement to principal top bars is not necessary where there is no transverse bending moment.
19. Clause 9.4.1 ⁴	<p>Wherever practicable, pure cantilevered slab arrangements should not be used for spans exceeding 750 mm, and beam-and-slab arrangements should be used for spans exceeding 1000 mm. When these requirements cannot be complied with, more stringent control than those given in this Code may be necessary.</p> <p>A cantilevered structure should have such a thickness that the following requirements and the requirements of clause 7.3 are complied with:</p> <ul style="list-style-type: none"> (a) 300 mm at the support of cantilevered beam; (b) 110 mm for cantilevered slab with span not exceeding 500 mm; (c) 125 mm for cantilevered slab with span greater than 500 mm but not exceeding 750 mm; 	<p>Instead of pure cantilevered slab arrangements, beam-and-slab arrangements should be used for spans exceeding 1200 mm. When these requirements cannot be complied with, more stringent control than those given in this Code may be necessary.</p> <p>A cantilevered structure should have such a thickness that the following requirements and the requirements of clause 7.3 are complied with:</p> <ul style="list-style-type: none"> (a) 300 mm at the support of cantilevered beam; (b) 110 mm for cantilevered slab with span not exceeding 500 mm; (c) 125 mm for cantilevered slab with span greater than 500 mm but not exceeding 750 mm; (d) 150 mm for cantilevered slab with span greater than 750 mm but not exceeding 1000 mm;

⁴ Requirements for cantilevered projecting structures are revised.

Item	Current version	Amendments
	<p>(d) 150 mm for cantilevered slab with span exceeding 750 mm.</p> <p>Cantilevered structures should be reinforced with ribbed steel reinforcing bars. Cantilevered slabs should have reinforcing bars in both faces and in both directions.</p> <p>Cantilevered structures exposed to weathering should be provided with:</p> <ul style="list-style-type: none"> (e) means to prevent accumulation of water; (f) effective waterproofing; (g) adequate fall which should not be less than 1:75; and (h) an effective drainage system. <p>Cantilevered slabs exposed to weathering should be designed for :</p> <ul style="list-style-type: none"> (i) exposure condition 2 or higher if appropriate; (j) estimated maximum crack width not exceeding 0.1 mm under serviceability limit state or the stress of deformed high yield steel reinforcing bars used should not exceed 100 N/mm² when checking the flexural tension under the working load condition. 	<p>(e) 175 mm for cantilevered slab with span exceeding 1000 mm but not exceeding 1200 mm.</p> <p>Cantilevered structures should be reinforced with ribbed steel reinforcing bars. Cantilevered slabs should have reinforcing bars in both faces and in both directions.</p> <p>Cantilevered structures exposed to weathering should be provided with:</p> <ul style="list-style-type: none"> (f) means to prevent accumulation of water; (g) effective waterproofing; (h) adequate fall which should not be less than 1:75; and (i) an effective drainage system. <p>Cantilevered slabs exposed to weathering should be designed for :</p> <ul style="list-style-type: none"> (j) exposure condition 2 or higher if appropriate; (k) estimated maximum crack width not exceeding 0.1 mm under serviceability limit state or the stress of deformed high yield steel reinforcing bars used should not exceed 100 N/mm² when checking the flexural tension under the working load condition.
<p>20. Clause 9.4.2 1st paragraph ²</p>	<p>The minimum percentage of top tension longitudinal reinforcement based on the gross cross-sectional concrete</p>	<p>The minimum percentage of top tension longitudinal reinforcement based on the gross cross-sectional concrete</p>

Annex

Item	Current version	Amendments
	area should be 0.25% for all reinforcement grades. The minimum diameter of this principal reinforcement should be 10 mm.	area should be 0.25% for all reinforcement grades but not less than that stipulated in clause 9.3.1.1(a) . The minimum diameter of this principal reinforcement should be 10 mm.
21. Clause 9.5.2.1 1 st paragraph ¹	The diameter of the transverse reinforcement (links, loops or helical spiral reinforcement) should not be less than 6 mm or $\frac{1}{4}$ the diameter of the largest longitudinal bar, whichever is the greater. The diameter of wires or welded mesh fabric when used for transverse reinforcement should not be less than 5 mm.	The diameter of the transverse reinforcement (links, loops or helical spiral reinforcement) should not be less than 6 mm or $\frac{1}{4}$ the diameter of the largest longitudinal bar, whichever is the greater. The diameter of wires or welded ■ fabric when used for transverse reinforcement should not be less than 5 mm.
22. Clause 11.7.5.2(b) ¹	bars or welded mesh fabrics;	bars or welded ■ fabrics;
23. Clause 12.1.8.2 ³	<i>Characteristic strength of concrete</i> The specified characteristic strengths of reinforcement are given in clause 3.2 and those for prestressing tendons are given in clause 3.3.	<i>Characteristic strength of concrete</i> The specified characteristic strengths of reinforcement are given in clause 3.2 and those for prestressing tendons are given in clause 3. ■4 .